



IK 08

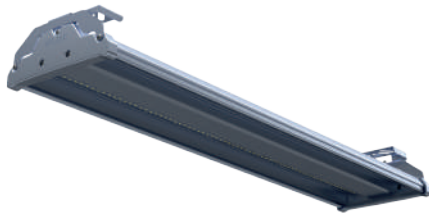

- High efficiency optical design (up to 160 lm/W)
- Anodized aluminum extrusion profile body
- Suitable for hygienic environments, dust-free body design
- UV protective PVC side cover
- Tempered glass with optional safety film
- High efficiency optical lens
- Optional stainless steel mounting clip

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Dimensions (L) (mm)	Weight (kg)
BERT40-PRO	WW-NW-CW	220-240V AC	35	5.075	415	2,9
BERT40-PRO	WW-NW-CW	220-240V AC	52	7.310	415	2,9
BERT80-PRO	WW-NW-CW	220-240V AC	65	10.270	815	4,8
BERT80-PRO	WW-NW-CW	220-240V AC	80	12.515	815	4,8
BERT120-PRO	WW-NW-CW	220-240V AC	90	14.310	1215	8,8
BERT120-PRO	WW-NW-CW	220-240V AC	110	17.135	1215	8,8
BERT160-PRO	WW-NW-CW	220-240V AC	134	21.010	1615	10,4

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

- WW: Warm White 3000K
- NW: Natural White 4000K
- CW: Cold White 6500K

*Different colors are optional

S Driver Options


- 01 Standard Driver
- 06 DALI Driver
- 11 Driver + Emergency Lighting Kit
- 16 Radar Sensor

O Lens Options



M: Medium Angle
W: Wide Angle

J Junction Options

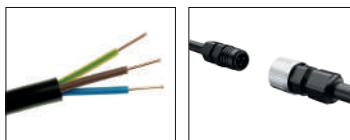

01: Cable

02: IP Socket

U Upper Part Options

- T: Tempered Glass
- T+F Tempered Glass with Safety Film




Order Code

P . W . C . S . O . J . U . M




Product Diagrams

Polar Diagram

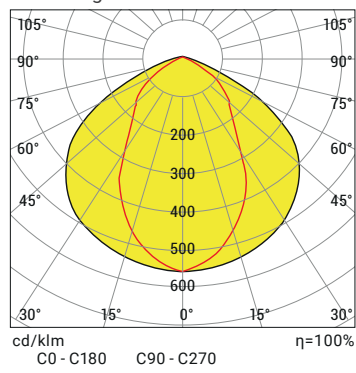


Conical Diagram

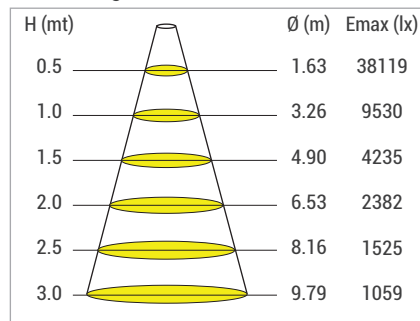

BERT120-PRO NW40 60D 110W 220VAC IP66

M Mounting Options

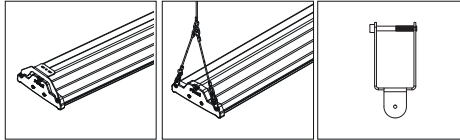

M01: Surface Cable Tray Mounting

M02: Pendant Mounting

M03: Busbar Hanger

**For M02 option rope not included*

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW 				•	•	